



Procedure for dealing with table skew

2022/05/17 MUTOH CSG

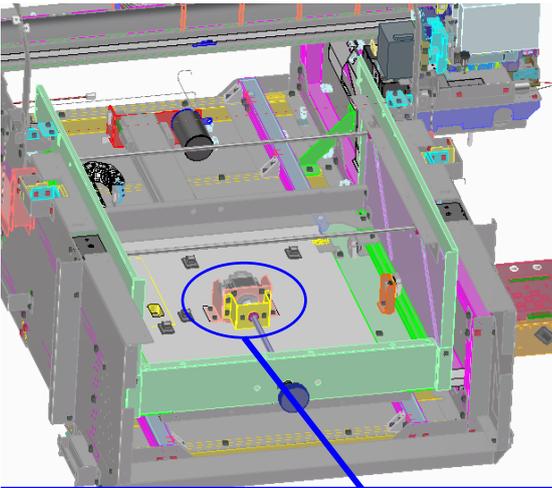

The table is fixed with 4 screws beside the motor.

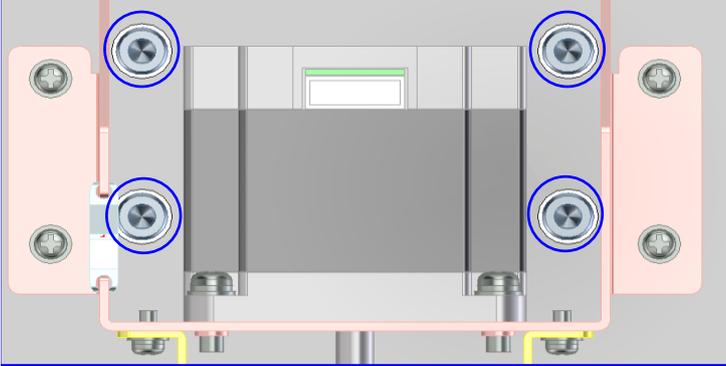

Loosen these four screws, check that the front of the table is level with the front of the rail, and retighten the screws.

