


Smart Charge Procedure for VJ-1948WX

July 5, 2018

MUTOH Industries Ltd.

1) Before performing initial ink charging, insert one S/C card into a card slot on the printer.

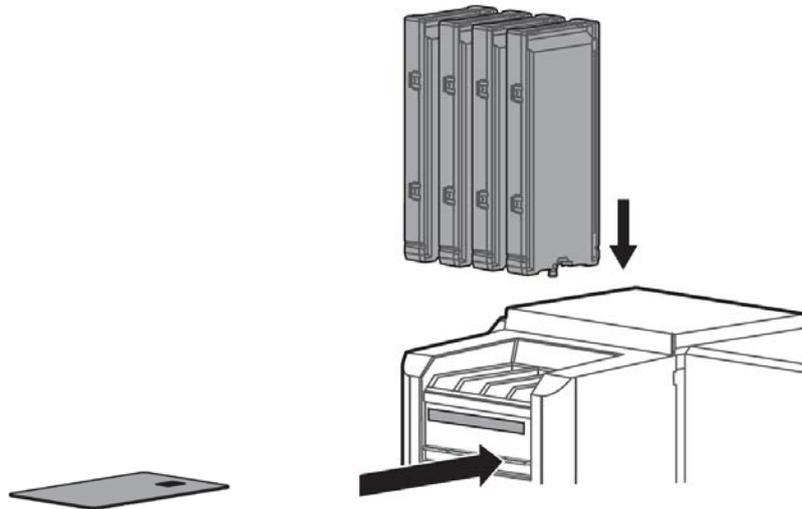


You can insert the S/C card into any card slots.

In the factory default, VJ-1948WX is set to S/C Card Mode.

Before inserting the S/C card, change the printer mode to Smart Charge mode from the ACG menu in ValueJet Club.

2) From the operation panel, choose the card slot number that you inserted the S/C card, then press **Enter** on the 'Charging -> Enter' message to start loading ink credits.

Menu7 “Card Charge” Menu Flow

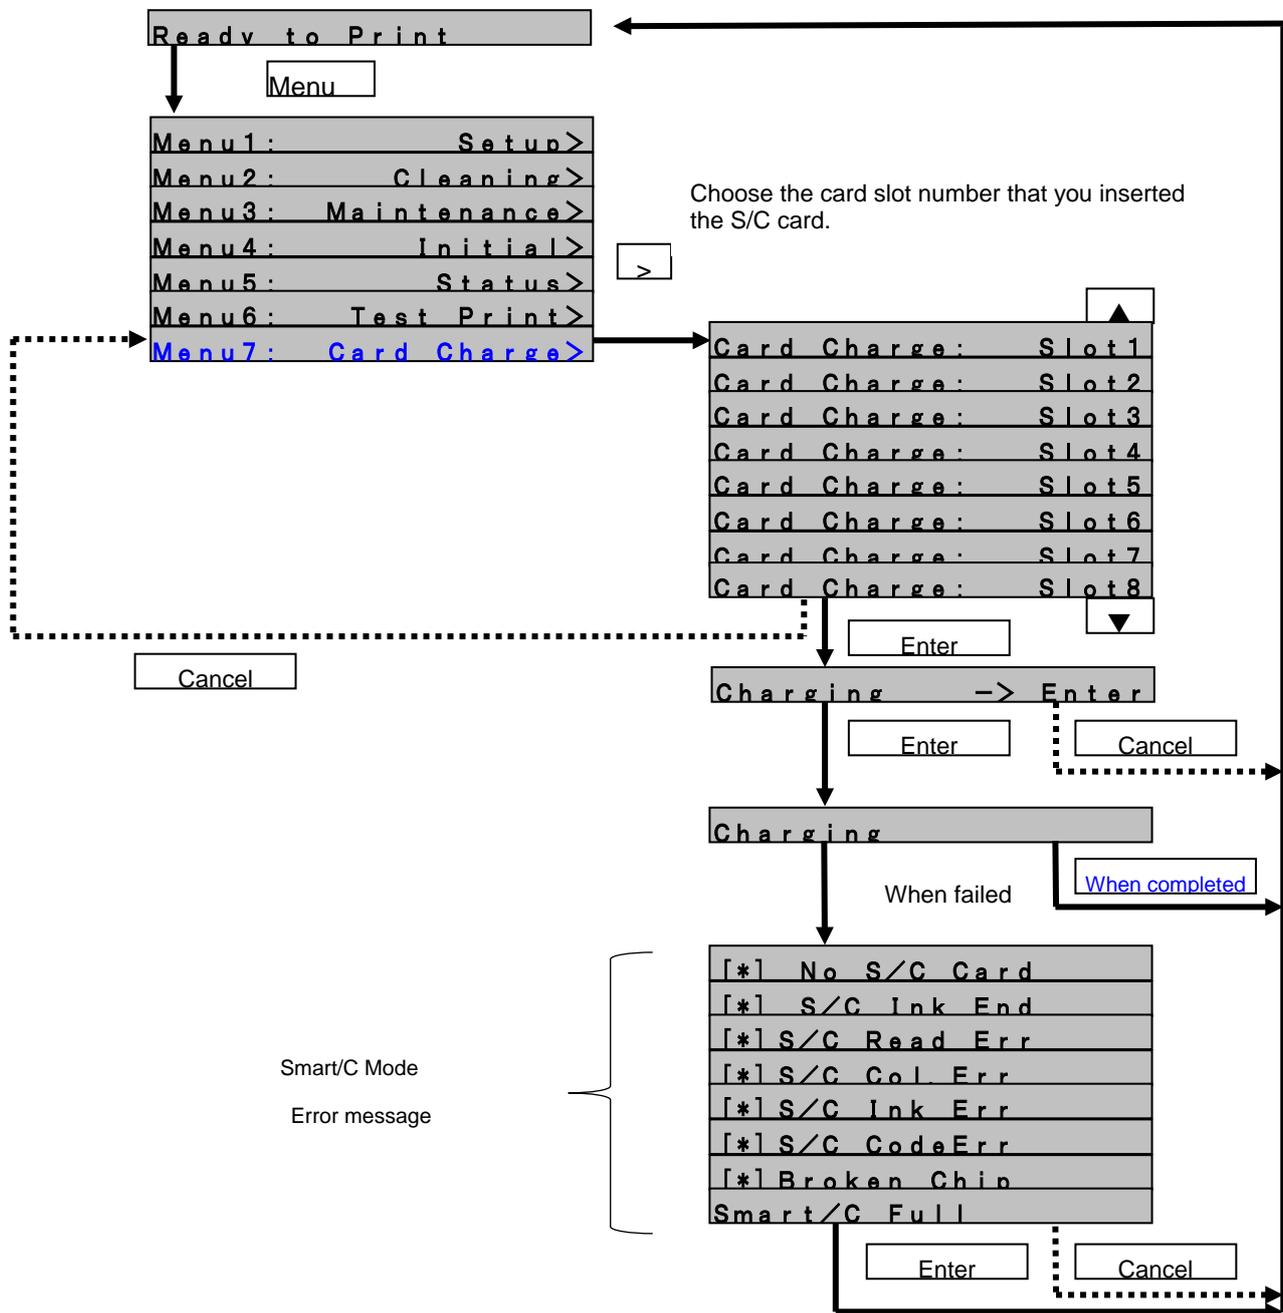


* 'Menu7: Card Charge' appears when the printer is set to Smart/C Mode.

* When failed to load credits, the appropriate error message appears on the operation panel.

3) After loading ink credits, remove the S/C card from the card slot.


LCD Flow in the Setup Menu Display (Warming-up / Receiving, Processing and Printing Data)

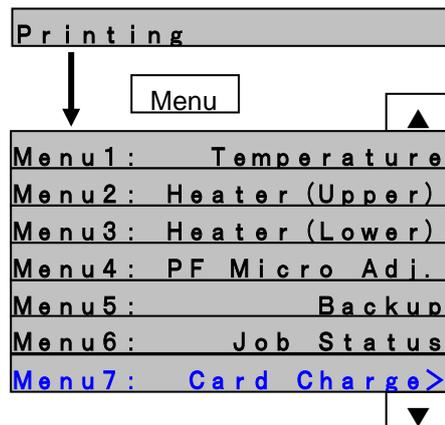

While printing, you can load ink credits from the "Menu7: Card Charge" menu.

"Status" Menu Flow

From the "Status1 Remain Ink" menu, you can check the remaining ink credits on the printer.

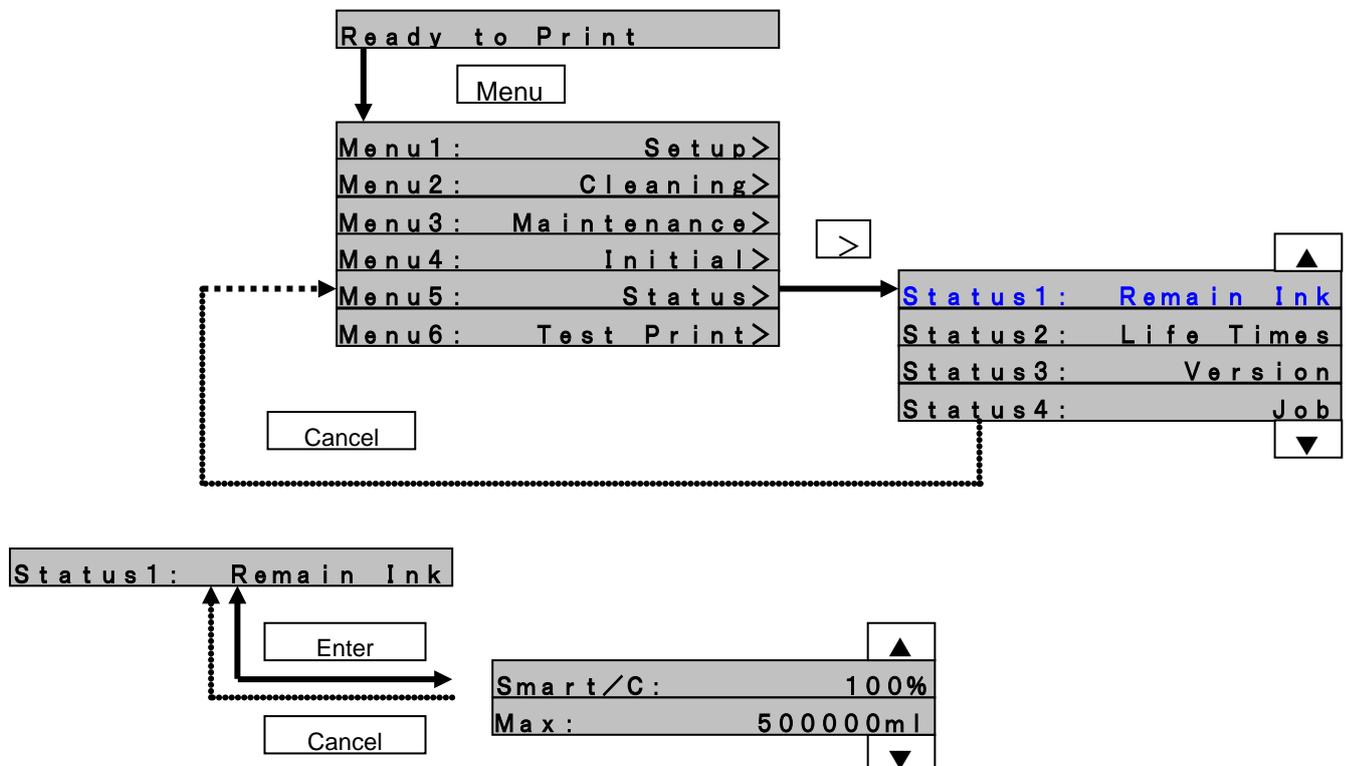

The maximum ink credits you can load will be 500,000ml (500L).