

Unwinder Upgrade Kit

How to mount the front winder Upgrade Kit

How to mount the KY-14626 front-winder upgrade kit for ZMY-146xx

The kit (not pré-assembled) contains of the following parts:


- 2x Weight tube 150 gr
- 2x Weight tube 300 gr
- 2x Weight Mount
- 10x Parker Screw
- 2x Lock Plate weight
- 6x Spring washer M4
- 6x Plain washer M4
- L bracket Swingb F D-Lock
- This instruction sheet




Step 1: Remove the screws of the fixed bar



Step 2: Gently remove the circlips of both the 2 rolling tube axis. Make sure not to loose them during removal.

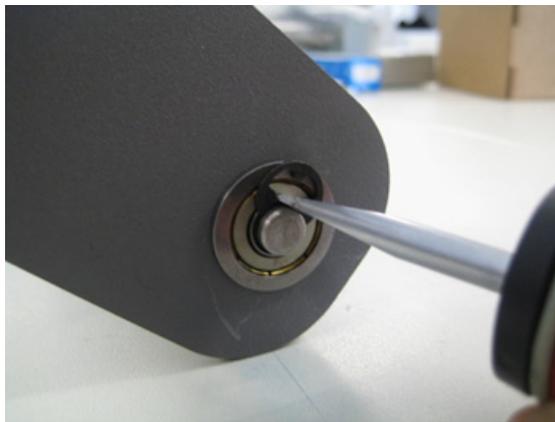

Step 3: Remove the bearings and put them back on the new swingbar plate

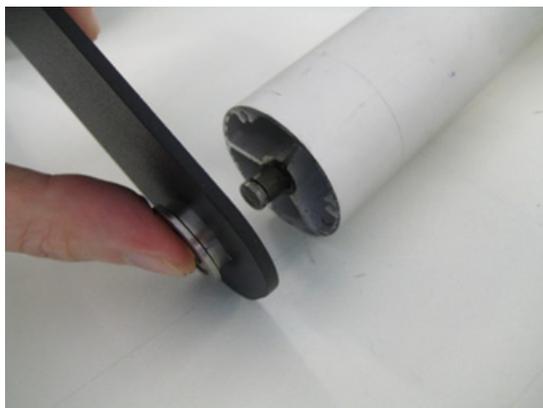

- Step 4:** Remount the fix aluminium tube + the 2 rolling tubes.
Make sure, the flanged bearings are correctly mounted and fixed with the circlips.



- Step 5:** Put the swingbar on a FLAT table. Ensure that the swingbar is making 100% contact on both sides of the surface, ensuring the complete assembly is perfectly aligned. Fix back the 3 screws tightly on both sides.



- Step 6:** Prepare the weight tubes




Step 7: Put the locking plates in the following way



Step 8: Fix the locking plates with screws. Don't screw them tightly, allowing the locking plates to move.



Step 9: Fix the weight tubes on the rear swingbar with the locking plate pointing like the picture below.

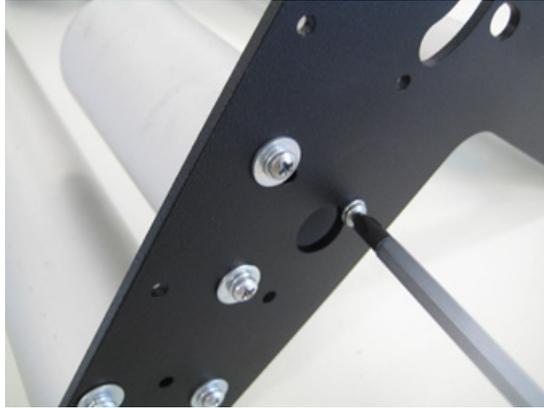

Note

- As you may notice in the picture, there is no large spring washer at this place, to make it possible to pass the swingbar lock through it.



Step 10: When finished, mount the front-swingbar back on the Unwinder / Winder 100 of the ValueJet unit